


1 3/8" Roller Conveyors

These 1-3/8" diameter gravity roller conveyors are extremely popular and are a standard in the industry. Ideal for the movement of light-medium weight packages. They are easily portable and can be used as a temporary or a permanent conveyor line. Poly covers available on 3" centers or more.



138-SR & 138-AR SERIES SPECIFICATIONS:

- Rollers: 1-3/8", 18 Ga. Galv./Alum. ♦ Axles: 1/4" Round, Spring Loaded
- ♦ Frame: 2-1/2" x 1" x 1", 12 Ga. Galv. or 1/8" Alum. Formed Channel
- ♦ 5 Cross Braces ♦ Hook and Bolt Couplers Standard ♦ Roller Cap. - Steel: 50 lbs, Alum.: 40 lbs ♦ 10' Frame Capacity - Steel: 50lbs/ft, Alum: 30 lbs/ft
- ♦ 5' Frame Capacity - Steel: 200lbs/ft, Alum: 100lbs/ft

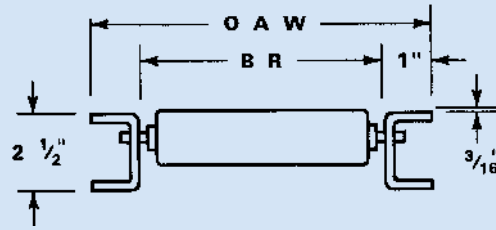

▶ 138-SR SERIES

| Roller Centers In | Model No | Over-All Width In | Between Rail Width In | WEIGHT | |
|-------------------|-------------|-------------------|-----------------------|------------------|-------------------|
| | | | | 5 Ft Section Lbs | 10 Ft Section Lbs |
| 1 1/2 | 138-SR-1512 | 12 | 10 | 49 | 98 |
| | 138-SR-1515 | 15 | 13 | 56 | 112 |
| | 138-SR-1518 | 18 | 16 | 67 | 130 |
| | 138-SR-1520 | 20 | 18 | 73 | 146 |
| | 138-SR-1524 | 24 | 22 | 87 | 168 |
| 3 | 138-SR-0312 | 12 | 10 | 33 | 65 |
| | 138-SR-0315 | 15 | 13 | 40 | 80 |
| | 138-SR-0318 | 18 | 16 | 43 | 82 |
| | 138-SR-0320 | 20 | 18 | 46 | 91 |
| | 138-SR-0324 | 24 | 22 | 53 | 101 |
| 4 1/2 | 138-SR-4512 | 12 | 10 | 27 | 53 |
| | 138-SR-4515 | 15 | 13 | 31 | 62 |
| | 138-SR-4518 | 18 | 16 | 36 | 68 |
| | 138-SR-4520 | 20 | 18 | 39 | 78 |
| | 138-SR-4524 | 24 | 22 | 43 | 83 |
| 6 | 138-SR-0612 | 12 | 10 | 25 | 49 |
| | 138-SR-0615 | 15 | 13 | 28 | 55 |
| | 138-SR-0618 | 18 | 16 | 33 | 62 |
| | 138-SR-0620 | 20 | 18 | 35 | 68 |
| | 138-SR-0624 | 24 | 22 | 37 | 71 |
| 12 | 138-SR-1212 | 12 | 10 | 25 | 46 |
| | 138-SR-1215 | 15 | 13 | 27 | 50 |
| | 138-SR-1218 | 18 | 16 | 29 | 53 |
| | 138-SR-1220 | 20 | 18 | 31 | 56 |
| | 138-SR-1224 | 24 | 22 | 33 | 60 |

▶ 138-AR SERIES

| Roller Centers In | Model No | Over-All Width In | Between Rail Width In | WEIGHT | |
|-------------------|-------------|-------------------|-----------------------|------------------|-------------------|
| | | | | 5 Ft Section Lbs | 10 Ft Section Lbs |
| 1 1/2 | 138-AR-1512 | 12 | 10 | 30 | 58 |
| | 138-AR-1515 | 15 | 13 | 34 | 68 |
| | 138-AR-1518 | 18 | 16 | 41 | 80 |
| | 138-AR-1520 | 20 | 18 | 43 | 89 |
| | 138-AR-1524 | 24 | 22 | 51 | 103 |
| 3 | 138-AR-0312 | 12 | 10 | 20 | 38 |
| | 138-AR-0315 | 15 | 13 | 22 | 43 |
| | 138-AR-0318 | 18 | 16 | 24 | 47 |
| | 138-AR-0320 | 20 | 18 | 26 | 50 |
| | 138-AR-0324 | 24 | 22 | 33 | 65 |
| 4 1/2 | 138-AR-4512 | 12 | 10 | 16 | 30 |
| | 138-AR-4515 | 15 | 13 | 18 | 36 |
| | 138-AR-4518 | 18 | 16 | 19 | 38 |
| | 138-AR-4520 | 20 | 18 | 20 | 39 |
| | 138-AR-4524 | 24 | 22 | 26 | 51 |
| 6 | 138-AR-0612 | 12 | 10 | 15 | 22 |
| | 138-AR-0615 | 15 | 13 | 18 | 32 |
| | 138-AR-0618 | 18 | 16 | 19 | 35 |
| | 138-AR-0620 | 20 | 18 | 20 | 37 |
| | 138-AR-0624 | 24 | 22 | 23 | 42 |
| 12 | 138-AR-1212 | 12 | 10 | 13 | 24 |
| | 138-AR-1215 | 15 | 13 | 15 | 27 |
| | 138-AR-1218 | 18 | 16 | 16 | 29 |
| | 138-AR-1220 | 20 | 18 | 17 | 31 |
| | 138-AR-1224 | 24 | 22 | 18 | 33 |