


1 5/8" Stainless Roller Conveyors

Stainless steel construction renders this conveyor ideal for food equipment and other wash-down operations. U.S.D.A. approved.

158-SSR SERIES SPECIFICATIONS:

- Rollers: 1-5/8", 16 Ga. Stainless Steel Tubing ♦ Delron Bearing with S.S. Balls
- ♦ Axles: 7/16" Hex S.S., Spring Loaded ♦ Frame: 2-1/2" x 1" x 1", 12 Ga. S.S. Formed Channel ♦ 5 Welded Cross Braces ♦ Roller Cap. - 100 lbs
- ♦ 10' Frame Capacity: 60lbs/ft ♦ 5' Frame Capacity: 235lbs/ft

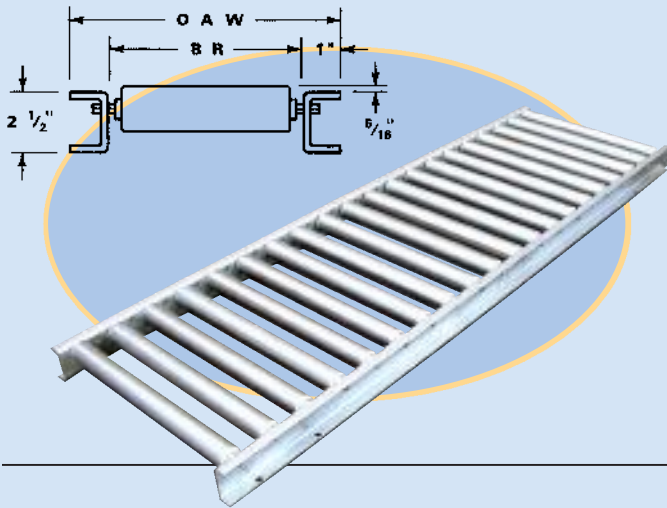

▶ 158-SSR SERIES


Roller Centers In	Model No	Over-All Width In	Between Rail Width In	WEIGHT	
				5 Ft Section Lbs	10 Ft Section Lbs
3	158-SSR-0312	12	10	55	101
	158-SSR-0318	18	16	76	139
	158-SSR-0324	24	22	97	177
	158-SSR-0330	30	28	118	206
4 1/2	158-SSR-4512	12	10	47	86
	158-SSR-4518	18	16	63	115
	158-SSR-4524	24	22	79	145
	158-SSR-4530	30	28	95	180
6	158-SSR-0612	12	10	39	70
	158-SSR-0618	18	16	51	93
	158-SSR-0624	24	22	56	103
	158-SSR-0630	30	28	63	115
12	158-SSR-1212	12	10	33	63
	158-SSR-1218	18	16	41	79
	158-SSR-1224	24	22	47	90
	158-SSR-1230	30	28	54	102

1.9" P.V.C. Roller Conveyors

The P.V.C. roller is the key ingredient for this non-marring conveyor. Specially ideal for glass handling, etc.

190-PVC SERIES SPECIFICATIONS:

- Rollers: 1.9" P.V.C. Schedule 80 ♦ Wall Thickness: .200" ♦ Delron Bearing Stainless Steel Balls ♦ Axles: 7/16" Hex, Spring Loaded ♦ Frame: 3-1/2" x 1" x 1", 10 Ga. Painted Steel Formed Channel ♦ 5 Welded Cross Braces
- ♦ Butt Couplers Standard ♦ 5' Frame Capacity: 400lbs./ft.
- ♦ 10' Frame Capacity: 140lbs./ft. ♦ Roller Cap. - 100 lbs.

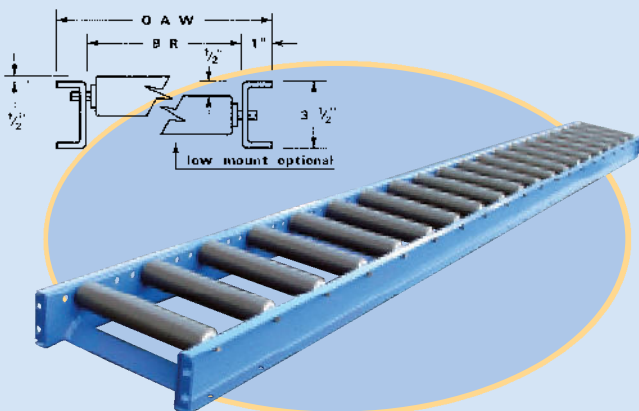

▶ 190-PVC SERIES

Roller Centers In	Model No	Over-All Width In	Between Rail Width In	WEIGHT	
				5 Ft Section Lbs	10 Ft Section Lbs
3	190-PVC-0312	12	10	65	125
	190-PVC-0318	18	16	85	165
	190-PVC-0324	24	22	95	185
	190-PVC-0330	30	28	110	215
4 1/2	190-PVC-4512	12	10	60	110
	190-PVC-4518	18	16	70	133
	190-PVC-4524	24	22	77	146
	190-PVC-4530	30	28	85	160
6	190-PVC-0612	12	10	55	103
	190-PVC-0618	18	16	60	117
	190-PVC-0624	24	22	68	132
	190-PVC-0630	30	28	76	147
12	190-PVC-1212	12	10	45	86
	190-PVC-1218	18	16	50	92
	190-PVC-1224	24	22	54	101
	190-PVC-1230	30	28	58	109